


Order Numbers for TRU-TAP™ Attachment

Designers & Manufacturers of Drilling & Tapping Solutions

SERIES ORDER NUMBER	SHANK	TYPE STOP ROD	CAPACITY		MAX. SPEED	NET WEIGHT
			SOFT MAT'L	STEEL		
15001 / 15001 QC	1" STRAIGHT SHANK	BRACKET PLATE	#00-1/4" M2-M6	#00-#10 M2-M5	3000 RPM	3 1/2 lbs.
15008 / 15008 QC	3/4" STRAIGHT SHANK	SLIDE WITH ADJ. SCREW	#00-1/4" M2-M6	#00-#10 M2-M5	3000 RPM	4 1/2 lbs.
15010 / 15010 QC	1" STRAIGHT SHANK	SLIDE WITH ADJ. SCREW	#00-1/4" M2-M6	#00-#10 M2-M5	3000 RPM	5 lbs.
16001 / 16001 QC	1" STRAIGHT SHANK	BRACKET PLATE	#8-1/2" M4-M12	#8-5/16" M4-M8	2500 RPM	5 lbs.
16008 / 16008 QC	3/4" STRAIGHT SHANK	SLIDE WITH ADJ. SCREW	#8-1/2" M4-M12	#8-5/16" M4-M8	2500 RPM	6 lbs.
16010 / 16010 QC	1" STRAIGHT SHANK	SLIDE WITH ADJ. SCREW	#8-1/2" M4-M12	#8-5/16" M4-M8	2500 RPM	6 1/2 lbs.

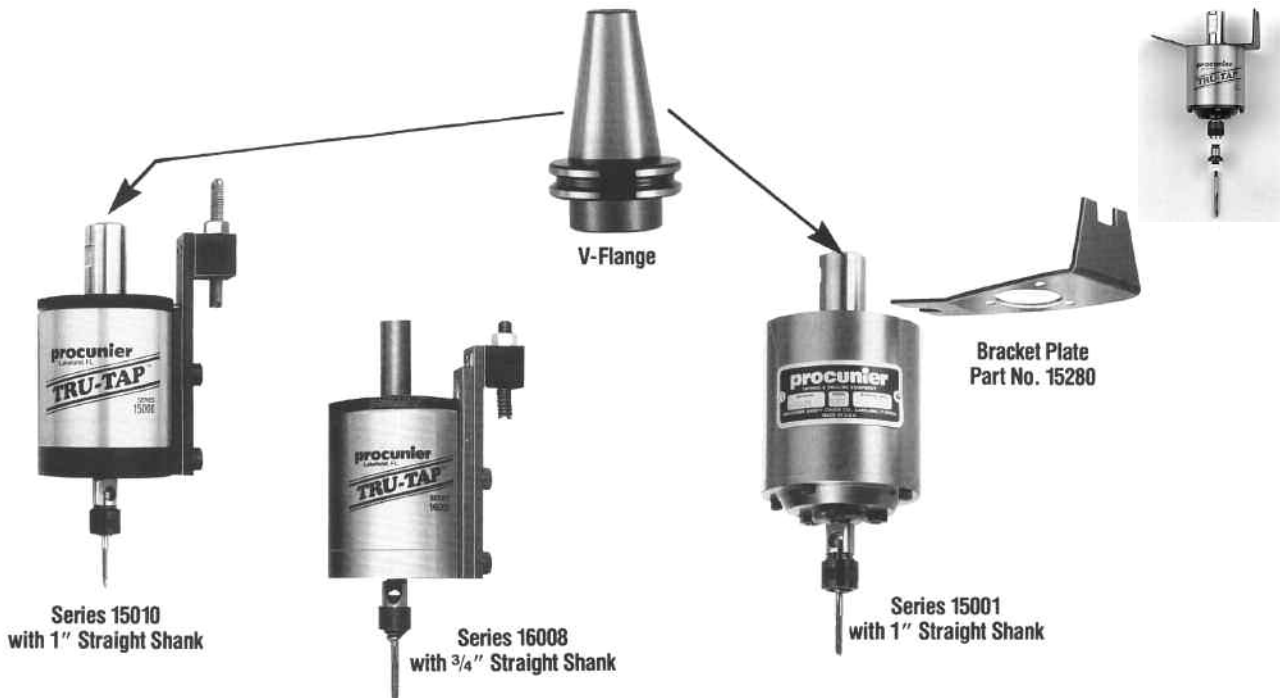

Standard equipment supplied:

Series 15000: Furnished with 2 wrenches.

Series 16000: Furnished with 2 wrenches.

NOTE: Collets Not Included - Must be Ordered separately.

ACCESSORIES

Collets

Series	Range
15000	Tap: 0 to 1/4" (M2 to M6)
16000	Tap: #8 to 1/2" (M5 to M12)

V-Flanges (Reduces overall projection)

Series	Description	Net Weight
15140	CAT 40, 1" Bore	1 1/2 lbs.
15150	CAT 50, 1" Bore	5 1/2 lbs.